





High speed precision spindles

SCHEDA TECNICA

# TMA5 EV ISO 30



| MODELLO            | TENSIONE [Volt] | FREQUENZA [Hz] | GIRI        | POT. RESA [Kw] | ASSORB. [Amp] | Cos j | PESO [Kg] |
|--------------------|-----------------|----------------|-------------|----------------|---------------|-------|-----------|
| TMA5 14/2 ISO30 EV | 350             | 200/300        | 12000/18000 | 7,0            | 16,0          | 0,85  | 30        |
| TMA5 14/2 ISO30 EV | 350             | 300/400        | 18000/24000 | 7,0            | 16,0          | 0,82  | 30        |

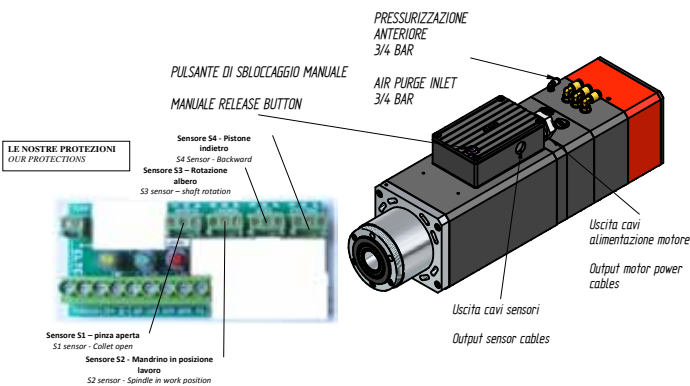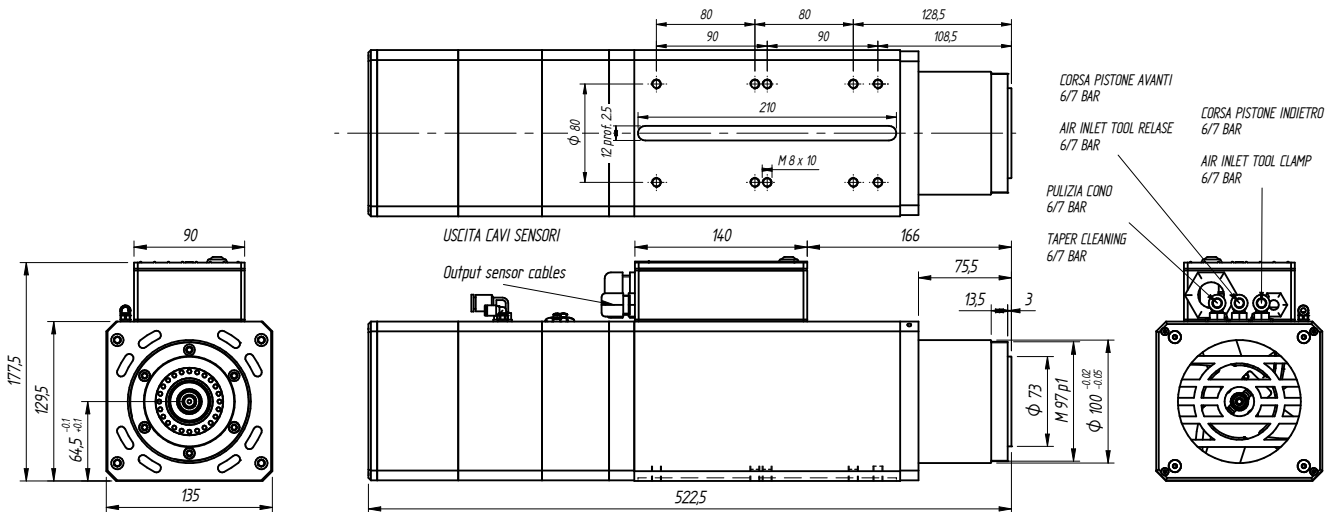

| VENTILATORE             |                       |              |
|-------------------------|-----------------------|--------------|
| Tensione nominale       | Nominal voltage       | 24 VDC       |
| Range tensione nominale | Nominal voltage range | 16 .. 30 VDC |
| Potenza                 | Power input           | 65 W         |

