


TMA 3 LA HSK E25



TYPE	VOLTAGE [Volt]	FREQUENCY [Hz]	RPM	DELIVER POWER [Kw]	ABSOR. [Amp]	Cos j	WEIGHT [Kg]
TMA3 12/2 HSK E25 compressed air	350	200/300	12000/18000	1,8	4,9	0,83	12
HSK E25 liquid	350	200/300	12000/18000	2,4	6,1	0,83	12
TMA3 12/2 HSK E25 compressed air	350	300/400	18000/24000	1,8	4,7	0,83	12
HSK E25 liquid	350	300/400	18000/24000	2,4	6,1	0,83	12
TMA3 12/2 HSK E25 compressed air	350	400	24000	2,2	5,8	0,83	12
HSK E25 liquid	350	400	24000	2,6	6,5	0,83	12

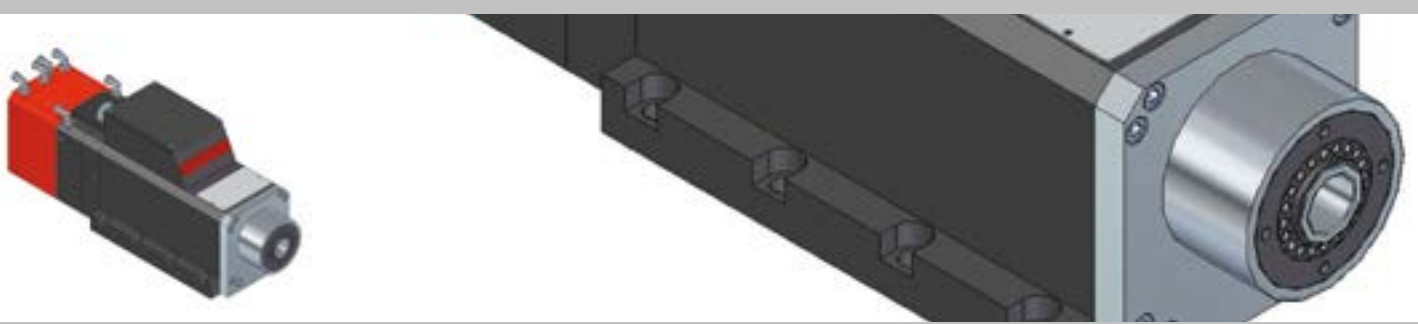