

膜片密封类型 04.1BO

概述


They are designed to isolate the sensing element of the gauges from process fluids which may be corrosive, viscous and sediment.

Leak proof tested, ensures the filling fluid separation from the process fluid

The diaphragm cleaning is possible removing the upper cup from the process connection.



DIMENSIONS

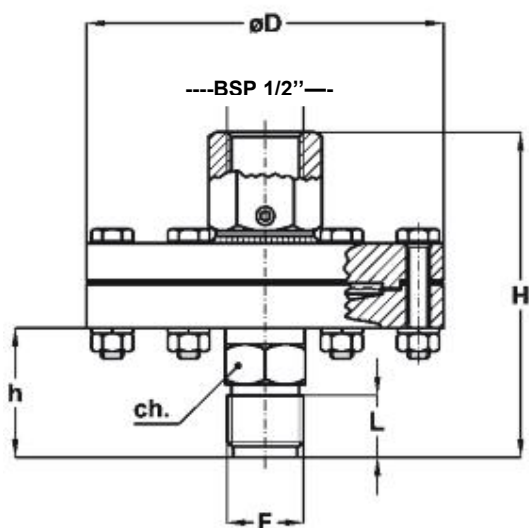

D	d	H	L	Ch
98	12	71	20	22



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980
网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen

技术参数

范围: from 0/1.....0/60 BAR and .. vacuum 工

艺温度: - 45 +150 °C

工作压力: PN 60 BAR

精度: (add to the instrument accuracy) $\pm 0,5\%$ for direct mounting and ± 1 for mounting with capillary 仪表

连接: AISI 316 st.st. $\frac{1}{2}$ BSP F.

隔膜: : AISI 316 L st.st.

垫圈: PTFE (MAX 250 °C)


工艺连接: AISI 316 thread 1/2 BSP M.

Filling liquid : silicone oil

Clamp-action bolts : AISI 304 st.st.

隔膜: **SEAL TYPE 04.1BS**

DIMENSIONS

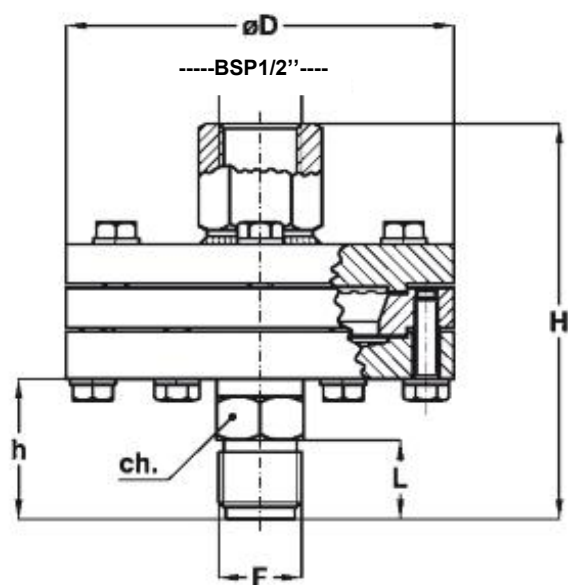

D	d	H	L	Ch
98	12	84,5	20	22



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980

网址: www.andrewen.com

www.andrewen.net

邮箱: info@andrewen

技术参数

范围: from 0/1.....0/60 BAR and .. vacuum

Pressure temperature : - 45 +150 °C

工作压力: PN 60 BAR

Accuracy : (add to instrument accuracy) $\pm 0,5\%$ for direct mounting and ± 1 for mounting with capillary

仪表连接: AISI 316 st.st. 1/2 BSP F.

隔膜: : AISI 316 L st.st.

垫圈: PTFE (MAX 250 °C)

工艺连接: AISI 316 st.st. + PTFE

Filling liquid: silicone oil

Clamp-action bolts : AISI 304 st.st.



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980
网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen