

膜片密封类型901

概述

These instruments are designed for neutral or aggressive fluids on technological systems. The diaphragm large surface and the filling liquid protect and repair the instrument from the corrosion.

PVC: Resistant to acids, alkali (ex. sodium carbonate, potash), detergents, alcohol, oil, greases, aliphatic hydrocarbons (from petroleum), petrol, water

PP: Resistant to almost every organic and inorganic acids, bases and salts, also at high concentrations.

PVDF: Resistant to almost every organic and inorganic acids, salt solutions and solvents.




安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980
网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen

DIMENSIONS

t Ø	DIMENSIONS mm						901 WEIGHT G		
	D	M Ø	D	H	h	b	PVC-U	PP	PVDF
BSP 1/4"	25	40	81	137	87	18	250	180	310
		50		149					
		63		171					
BSP 1/2"	32	80	81	185	87	22	460	320	590
		100		205					
		160		265					

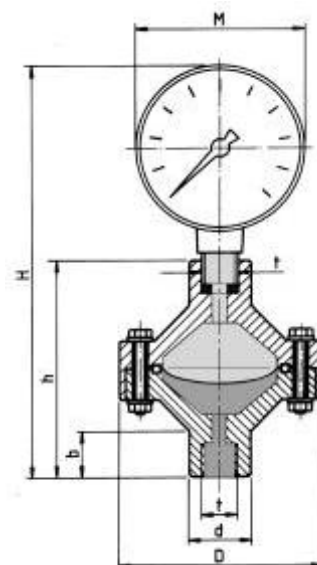

技术参数

范围: from 0/1.....0/10 BAR

Body material :u-PVC, PP(Polypropylene) and e PVDF (polyvinylidene fluoride)

工艺温度 :

u-PVC	+60 °C
PP	+80 °C
PVDF	+120 °C

Working 精度: PN 10 BAR with water at 20 °C

精度: (add to instrument accuracy) $\pm 0,5\%$ for direct mounting

仪表连接: thread 1/2 BSP F.

隔膜: : CSM , PTFE/EPDM coated

工艺连接 : thread 1/2 BSP M. or thread 1/2 BSP F.

Filling liquid : silicone oil

Clamp-action bolts : stainless steel



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980
 网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen