

REV. SE.552023.00

ISO50 DIN 69871

ISO 50 Cono ISO 50
ISO 50 toolholder


Servoventola 24 Volt D/C
24 Volt D/C servo fan

Cambio utensile automatico con encoder TTL
Connettore encoder volante
Pneumatic automatic tool change by TTL encoder
In-line encoder connector


Giunto rotante integrato "Ghost"
Integrated rotary joint "Ghost"

Curva di coppia / potenza personalizzabile
Customizzabile Torque / Power diagram

Compatibile con Saccardo "AX" asse C.
Suitable for working with Saccardo "AX" C axis.

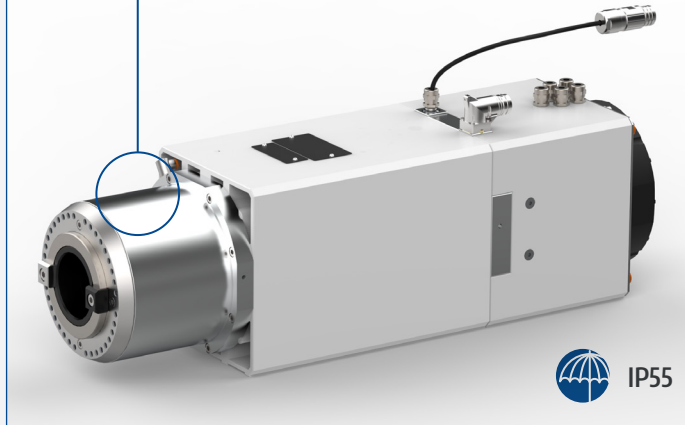

DUTY		S1	S6 - 60%
POWER	kW	14	16,5
TORQUE	Nm	30,2	35,7
VOLTAGE	V	400	400
RATED FREQUENCY	Hz	150	150
RATED SPEED	rpm	4433	4420
MAX. FREQUENCY	Hz	267	267
MAX. SPEED	rpm	8000	8000

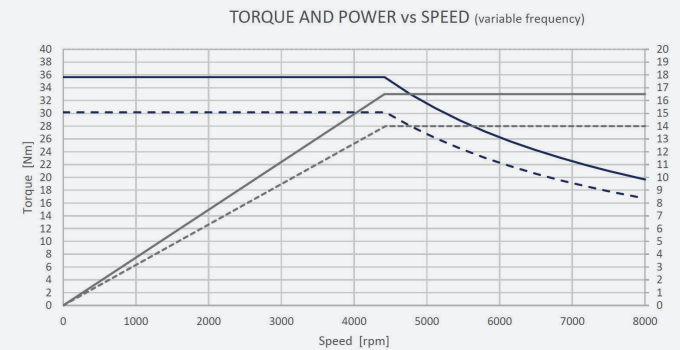

SE.SA 170 ISO50

www.saccardo.it

M A D E I N I T A L Y

